

ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021

Autoclaved Aerated Concrete Reinforced Panel (Lento)

Manufactured by Nuh Yapı Ürünleri A.Ş.

"EPD of multiple products, based on the representative product, density ranges from 450 kg/m³ to 550 kg/m³ with representative density of 500 kg/m³"

Programme: The International EPD System
www.environdec.com

Programme Operator: EPD International AB

Licensee: EPD Türkiye

EPD Registration Number: EPD-IES-0022603

Version Date: 2025-08-18

Validity Date: 2030-08-17

Type of EPD: EPD of multiple products from a company

An EPD may be updated or
republished if conditions change.

To find the latest version of the
EPD and to confirm its validity, see
www.environdec.com



Programme Information

The International EPD System: EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden,
support@environdec.com

EPD Türkiye: NEF 09 B Blok No:7/15, 34415 Kağıthane/İstanbul, Türkiye
info@epdturkey.org

CEN standard EN 15804 serve as the core Product Category Rules (PCR)

PCR 2019:14 Construction products, version 2.0.1., Construction EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works, UN CPC code is 3755: Prefabricated structural components for building or civil engineering, of cement, concrete or artificial stone

PCR review was conducted by: The Technical Committee of the International EPD System. A full list of members is available on www.environdec.com. The review panel may be contacted via support@environdec.com. Review Chair: Review Chair: Rob Roewette, Noa Meron.

Members of the Technical Committee were requested to state any potential conflict of interest with the PCR Committee, and if there were conflicts of interest they were excused from the review.

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:
x Individual EPD verification without a pre-verified LCA/EPD tool

Third party verifier: Stephen Forson ViridisPride

Approved by: The International EPD System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No **X**

Nuh Yapı Ürünleri A.Ş. has the sole ownership, liability, and responsibility for this EPD.

Life Cycle Assessment (LCA) accountability: Furkan Can Akalın & Yıldırım Yılmaz -

Metsims Sustainability Consulting

info@metsims.com

EPDs within the same product category but registered in different EPD programmes may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison.

The EPD owner has the sole ownership, liability, and responsibility for this EPD.





How to Read This EPD?

An Environmental Product Declaration (EPD) is an ISO Type III Environmental Declaration based on ISO 14025 standard. An EPD transparently reports the environmental performance of products or services from a lifecycle perspective. The preparation of an EPD includes different stages, from acquiring raw materials to the end of life of the final product/service. EPDs are based on international standards and consider the entire value chain. Additionally, EPD is a third-party verified document. This EPD includes the following sections described below.

1. General and Program Information

The first part of an EPD has information about the name of the manufacturer and product/service and other general information such as the validity and expiration dates of the document, the name of the program operator, geographical scope, etc. The second page states the standards followed and gives information about the program operator, third-party verifier, etc. The followed Product Category Rule (PCR) is indicated on the second page.

2. Company and Product/Service Information

Information about the company and the investigated product is given in this section. It summarizes the characteristics of the product provided by the manufacturer. It also includes information about the product such as product composition and packaging.

3. LCA Information

Life Cycle Analysis (LCA) information is one of the most important parts of the EPD as it describes the functional/declared unit, time representativeness of the study, database(s) and LCA software, along with system boundaries. The table presented in this part has columns for each stage in the life cycle. The considered stages are marked 'X' whereas the ones that are not considered are labeled as 'ND' (Not Declared). Not all EPDs consider the full life cycle assessment for a product's entire life stages. The 'System Boundary' page is also the place where one can find detailed information about the stages and the assumptions made.

4. LCA Results

The results of the LCA analysis are presented in table format. The first column in each table indicates the name of the impact category and their measurement units are presented in the second column. These tables show an amount at each life cycle stage to see the impact of different indicators on different stages. Each impact can be understood as what is released through the production of the declared unit of the material. The benefits of reuse/recycling of the declared product are reflected in this section.

The first impact in the table is global warming potential (GWP), which shows how much CO₂ is released at each stage. Other impacts include eutrophication potential, acidification potential, ozone layer depletion, land use related impacts, etc. The second table provides results for resource use and the third table is about the waste produced during production. The fourth and final table shows the results for the GWP-GHG indicator, which is almost equivalent to the GWP-Total indicator mentioned previously. The only difference is that this indicator excludes the biogenic carbon content by following a certain methodology.



About the Company



Owner of the EPD: Nuh Yapı Ürünleri A.Ş.

Production Plant: Hacı Akif Mh.Nuh Çimento Cd. No:32 Hereke / KOCAELİ - TÜRKİYE

Nuh Yapı Ürünleri A.Ş. was established in 1995 in Hereke, Kocaeli, as a subsidiary of the Nuh Cement Group. The company initially started operations in the construction sector with the production of lime and autoclaved aerated concrete (AAC). Over time, it has expanded its product range in response to evolving market demands and R&D efforts.

Today, the company operates across various sectors including iron and steel, aluminum, chemicals, mining, paper, energy, water treatment, wastewater treatment, agriculture, and dental gypsum production. Through R&D projects supported by TÜBİTAK TEYDEP, the company developed thermal insulation boards from AAC and established a production process for aluminum paste, a key raw material in AAC manufacturing.

With its patented Alpha Gypsum Process, developed internally and protected by a detailed (examination-based) patent, Nuh Yapı Ürünleri manufactures and markets alpha gypsum domestically and internationally. Within the magnesium product line, the company has developed a petroleum coke combustion aid additive, which helps eliminate operational bottlenecks in cement kilns, thereby increasing production capacity and reducing shutdowns for cleaning.

As of 2024, Nuh Yapı Ürünleri has also introduced a new product line for dental gypsum, expanding its innovation-driven approach into the healthcare field.





Product Description:

Reinforced autoclaved aerated concrete (AAC) elements are lightweight, mineral-based building components manufactured using a mixture of sand, cement, lime, gypsum, water, aluminum paste, and embedded steel reinforcement. During production, a chemical reaction generates millions of air pores, forming a material with excellent thermal insulation and low density. The inclusion of reinforcement allows these elements to be used in load-bearing or long-span structural applications where enhanced mechanical performance is required.

This EPD is a representative EPD for reinforced AAC elements and covers the product class G3/500. Within the assessed product group, densities range from a minimum of 450 kg/m³ to a maximum of 550 kg/m³. For modelling in this study, a product with a density of 500 kg/m³ was selected as the declared product. This selection does not imply that the 500 kg/m³ product represents other densities within the group; it is simply the specific product modelled within the scope of the representative EPD.

Applications:

AAC wall blocks are used in residential, commercial, and industrial buildings, particularly in structural and semi-structural applications.

Advantages:

- Natural thermal insulation without additional materials
- A1-class non-combustible material, resistant up to 1000 °C
- Lightweight and easy to install
- Reduces construction time and labor effort
- Lightweight and easy to cut, shape, and install
- Factory-prefabricated for dimensional precision

Technical Specifications

| Technical Characteristic | Relevant Standard | Value | Unit |
|--|-------------------|------------|-------------------|
| Compressive Strength | EN 845-2+A1:2016 | 3.5 | N/mm ² |
| Gross Dry Unit Volume Weight | | 500 | kg/m ³ |
| Load Bearing Capacity | | Min 1.5 | kN/m |
| Deflection (at 0,5 kN/m load bearing capacity) | | Max. L/200 | mm |
| Thermal Conductivity | | 0.13 | W/m.K |
| Water Vapor Diffusion Coefficient | | 5/10 | μ |
| Fire Resistance | | A1 | Class |



System Boundaries & Description

A1 - Raw Material Supply

This stage covers the extraction, processing, and pre-treatment of raw materials prior to their delivery to the manufacturing site. The environmental impacts associated with raw materials such as cement, lime, aluminum powder, sand, water, reinforcement steel, and other inputs used in the production of reinforced autoclaved aerated concrete (AAC) elements are considered in this stage.

To reduce the consumption of natural silica sand, alternative materials such as waste-derived sands from ceramic production and ground granulated blast furnace slag (GGBFS) are partially used as substitutes. In addition, fresh (uncured) AAC slurry is recycled back into the production process, while broken cured AAC elements are also collected and reused in the raw mix formulation. These internal recycling practices help lower the demand for virgin materials and mitigate the environmental impacts associated with raw material extraction and processing. The environmental impact of the reinforcement steel used within the AAC elements is also included in this stage, based on its production and integration during the forming process.


A2 - Raw Material Transport

Transport information for raw materials is supplied by the manufacturer, including distance and transport mode details. Based on this data, the environmental impacts associated with the transportation of raw materials to the production site are calculated, considering both routes and transportation types (e.g., road, rail, or sea). All raw materials and packaging used in the product were supplied domestically by road.

| Transport Mode | Type |
|----------------|------------------------------|
| Road | Vehicle: Lorry |
| | Size Class: 16-32 metric ton |
| | Emission Standard: EURO6 |
| | Fuel Type: Diesel |

A3 - Manufacturing

This stage accounts for the environmental impacts associated with the manufacturing processes of the reinforced autoclaved aerated concrete (AAC) product. All energy-related input data, including electricity and steam consumption, are provided by the manufacturer. At Nuh Yapı, electricity and steam are used during production, with steam being generated on-site using coal as the primary energy source. In addition to the standard AAC production steps, this stage also includes processes specific to reinforced elements, such as preparation, and placement of reinforcement steel into molds. The impacts of packaging materials used for the final product are also accounted for. The manufacturing stage encompasses all processes up to the point where the reinforced AAC product is ready for dispatch, as illustrated in the production flow diagram below.

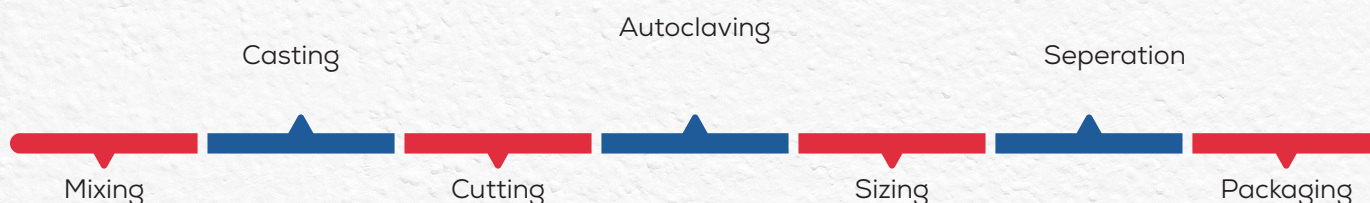

System Boundaries & Description

Scenarios used are realistic and representative of one of the most probable alternatives and shall not include processes or procedures that are not in current use, or which have not been demonstrated to be practical. (For module A4, A5, B1-B7, C1-C4, & D)

A4 - Product Transport

This stage includes the transportation of the finished product from the manufacturing facility to the customer. Transport distances and routes are determined based on information provided by the manufacturer. Depending on the customer's location, the product is primarily delivered by road (truck), rail, or seaway. While the main transport mode is typically road, rail and maritime transport are also used where applicable. The environmental impacts of these transport activities are calculated based on transport type, distance traveled, and payload.

| Transport Mode | Type |
|----------------|------------------------------|
| Road | Vehicle: Lorry |
| | Size Class: 16-32 metric ton |
| | Emission Standard: EURO6 |
| | Fuel Type: Diesel |

A5 - Installation

This stage accounts for the environmental impacts associated with the installation of the product at the construction site. In this study, 10 kg of mortar and 0.5 kg use of steel reinforcement used during the assembly of the autoclaved aerated concrete (AAC) reinforced panels is included. Additionally, the end-of-life treatment of packaging materials is considered within this stage and assessed accordingly.

B1 - Use

During the use phase, the cement and lime content within AAC reinforced panels, both containing calcium oxide (CaO), contribute to the absorption of carbon dioxide (CO₂) from the atmosphere via the natural carbonation process. Theoretical CO₂ uptake over the product's service life is estimated based on the CaO content, following the methodology described in Hartmut B. Walther (2022). A recarbonation rate of 85% over a 50-year period is assumed in this assessment.

$$CO_2 \text{ absorption rate} = \left(\text{Cement in the product (kg)} \times \text{Cement CaO rate (\%)} \right) + \left(\text{Lime in the product (kg)} \times \text{Lime CaO rate (\%)} \right) \times \frac{CO_2 MW \left(\frac{g}{mol} \right)}{CaO MW \left(\frac{g}{mol} \right)}$$

| | |
|--|------|
| CaO ratio in cement (%) | 65 |
| CaO ratio in lime (%) | 80 |
| CO ₂ molecular weight (g/mol) | 44 |
| CaO molecular weight (g/mol) | 56 |
| Service year (year) | 50 |
| CO ₂ absorption rate | 84.8 |
| CO ₂ absorption rate 85% recarbonation rate | 72.1 |



System Boundaries & Description

B2 – Maintenance

AAC reinforced panels are inherently durable and stable, requiring no maintenance throughout their service life. Therefore, this module does not contribute any environmental impacts.

B3 – Repair

Due to their structural integrity and resistance to common forms of degradation, AAC reinforced panels do not require repair during their use phase. As a result, no environmental burdens are associated with this stage.

B4 – Replacement

The longevity of AAC reinforced panels eliminates the need for replacement under normal use conditions. Hence, this module is considered to have no impact.

B5 – Refurbishment

Refurbishment activities are not applicable to AAC reinforced panels, as the material maintains its performance without the need for renewal or upgrade. No related environmental impact is reported in this module.

B6 – Operational Energy Use

AAC reinforced panels function as passive construction elements and do not require any operational energy input during their use. Accordingly, no energy-related emissions or impacts are assigned to this phase.

B7 – Operational Water Use

There is no operational water demand associated with AAC blocks. The material does not require water during its use phase, and thus this module does not contribute to water-related environmental impacts.

C1 – Demolition

The energy required for the demolition or deconstruction of the AAC reinforced panels is estimated at 10 kWh diesel per ton of product according to PCR 2019:14 v2.0.0. Accordingly, for a reference product weight of 500 kg, a total of 5 kWh of diesel is assumed to be consumed during demolition.

C2 – Waste Transport

This stage covers the transportation of the demolished material to a disposal or recycling facility. An average transport distance of 80 km by truck with 50% load factor is assumed according to PCR 2019:14 v2.0.0. The transport parameters used in the calculation are as follows:

| Transport Mode | Type |
|----------------|------------------------------|
| Vehicle Type | Vehicle: Lorry |
| | Size Class: 16-32 metric ton |
| | Emission Standard: EURO5 |
| | Fuel Type: Diesel |
| Distance | 100 km |



System Boundaries & Description

C3 - Waste Processing

This stage covers the activities involved in the treatment of the product after its demolition and prior to its final disposal or recovery. For reinforced autoclaved aerated concrete (AAC) elements, this includes both the separation of embedded steel reinforcement and the processing of AAC material itself. In this study, it is assumed that reinforced AAC waste is sorted on-site or at a recovery facility to allow for potential recycling or material recovery. The steel reinforcement is mechanically separated from the AAC matrix using crushing and magnetic separation techniques. Recovered steel can then be sent for recycling in steel manufacturing processes. The remaining AAC fragments can be crushed and repurposed, for instance, as a secondary aggregate in road base layers or non-structural concrete applications. The environmental impacts associated with these processing steps—including mechanical separation, material transport, and energy use—are calculated based on the technologies employed and the efficiency of the recovery systems used.

C4 - Disposal

At this stage, the final fate of the product is determined. It is assumed that a portion of the AAC waste is recycled, substituting natural aggregate in concrete production. In line with data from the Cement Sustainability Initiative (CSI), a substitution rate of 30% is applied in this study, while the remaining 70% of the product is considered to be landfilled. The environmental impacts related to landfilling – including emissions from decomposition and loss of material value – are calculated accordingly. For the embedded reinforcement steel, a recycling rate of 64% is applied in accordance with European average values reported by recognized industry sources. The environmental credits associated with the unrecovered fraction (36%) are accounted for in this stage.

D - Reuse, recovery, or recycling potential

This module quantifies the potential environmental benefits associated with reusing or recycling the product after its end-of-life. The recycled AAC material, when used as a partial replacement for natural aggregates in concrete production, contributes to resource conservation and reduction of associated emissions. In this study, a 30% substitution rate is assumed, and the resulting environmental benefits are allocated to this module. These benefits include avoided raw material extraction, reduced processing impacts, and a contribution to overall waste minimization in future production cycles. In addition, for reinforced steel, the embedded structural steel is assumed to be recycled at a rate of 95% in line with European average values. The use of recycled steel in place of primary steel provides significant environmental savings by avoiding energy-intensive virgin steel production. These avoided burdens—primarily related to greenhouse gas emissions and raw material extraction—are also included as environmental credits in this module.



LCA Information

Declared unit: 1 m³ (500 kg) of Autoclaved Aerated Concrete Reinforced Panel (Lento) with 50 years lifespan produced by Nuh Yapı.

Conversion factor: 0.0020 m³ / kg

Time representativeness: Full year of 2024 (2024-01-01 to 2024-12-31).

Database(s) and LCA software: Ecoinvent 3.10 and SimaPro 9.6

Geographical scope:

Module A1 and A2 Material suppliers are located in Türkiye (TR)


Module A3 production is located in Türkiye (TR)

Module A4 transport locations are Global (Türkiye, European)

Module A5, B, C and D scenarios are for Global

Description of system boundaries: Cradle to grave and module D (A + B + C + D)

Process flow diagram:

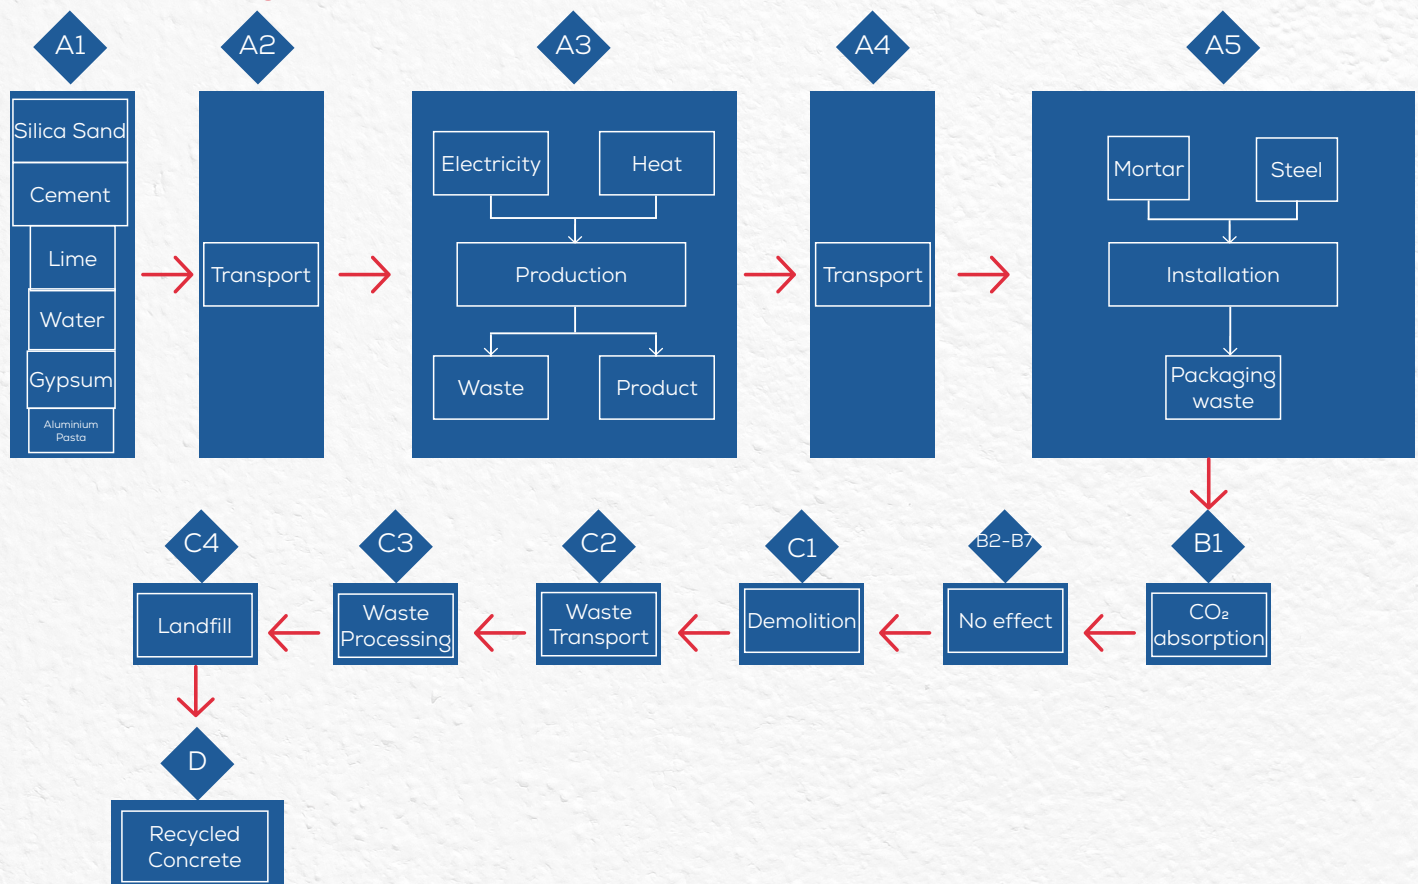

Source of Electricity

The electricity data modelled for the production processes is taken from Ecoinvent 3.10 dataset that represents medium voltage electricity production in Türkiye with the reference year, 2021. The dataset consist the following production percentages for electricity. Coal, 37%, Hydro, 33%, Natural gas, 17 %, Wind, 8%, Geothermal, 3%, Biogas, 1%, Other, 1%, Biomass, <1%. The Climate impact (GWP-GHG) impact of the electricity is 0.575 kg CO₂ eq. / kWh.

Allocation

Source of raw material, water consumption, energy consumption and raw material transportation were weighted according to 2024 production figures. In addition, hazardous and non-hazardous waste amounts were also allocated from the 2024 total waste generation.



LCA Information

| | Product Stage | | | Construction Process Stage | | Use Stage | | | | | | | End of Life Stage | | | | Resource recovery stage |
|------------------------|---------------------|-----------|---------------|----------------------------|---------------------------|-----------|-------------|--------|-------------|---------------|------------------------|-----------------------|-----------------------------|-----------|------------------|----------|------------------------------------|
| | Raw Material Supply | Transport | Manufacturing | Transport | Construction Installation | Use | Maintenance | Repair | Replacement | Refurbishment | Operational Energy Use | Operational Water Use | Deconstruction / Demolition | Transport | Waste Processing | Disposal | Reuse-Recovery-Recycling-potential |
| Module | A1 | A2 | A3 | A4 | A5 | B1 | B2 | B3 | B4 | B5 | B6 | B7 | C1 | C2 | C3 | C4 | D |
| Modules Declared | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| Geography | TR | TR | TR | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO | GLO |
| Share of specific data | 55% | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation - Products | -9% +6% | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| Variation - Sites | 0% | | | - | - | - | - | - | - | - | - | - | - | - | - | - | - |

(ND = Not declared, X = Module included)

Cut-Off Criteria

The criteria for exclusion were set so that individual input flows less than 1% of the total, with a cumulative limit of less than 5%, could be omitted. This was contingent upon confirming that these excluded flows did not significantly alter the reported data, with "significant" defined as affecting the total by less than 5%.

REACH Regulation

No substances included in the Candidate List of Substances of Very High Concern for authorization under the REACH regulations are present in this product either above the threshold for registration with the European Chemicals Agency or above 0.1% (wt/wt).

Reference Service Life (RSL)

The service life of autoclaved aerated concrete (AAC) products is generally considered to be approximately 50 years under proper use and maintenance conditions. Unless exceptional circumstances occur, they maintain their durability and functionality throughout this period.

Background Data

For all LCA modelling and calculation, Ecoinvent database (v3.10) and SimaPro (v9.6) LCA software were used. Characterization factors of EN 15804 reference package based on EF 3.1 are utilized. Impact of infrastructure and capital goods are excluded from the analysis.

LCA Modelling and Calculation Data Quality

The results of the LCA with the indicators as per EPD requirement are given in the LCA result tables. All energy calculations were obtained using Cumulative Energy Demand (LHV) methodology, while fresh water use is calculated with selected inventory flows in SimaPro according to the PCR. There are no co-product allocations within the LCA study underlying this EPD. The regional energy datasets were used for all energy calculations.



LCA Information

Data Quality

The EPD is based on data collected by Nuh Yapı from one site over one year from January 2024. The EPD is representative of the production of autoclaved aerated reinforced concrete. The use and end-of-life stage of the EPD covers mostly Europe. The EPD study is representative, with the selected product having a density of 500 kg/m³. Within the relevant product group, densities range from a minimum of 450 kg/m³ to a maximum of 550 kg/m³, with no changes to the product recipes. Due to the weight differences, the GWP values vary between -9% and +6%, while the variations in other LCA indicators range from -11% to +10%. Background data was sourced from the Ecoinvent 3.10 database. No fair, poor or very poor data was found during the assessment of relevant data using EN 15804:2012+A2:2019, Annex E, only E.2.

| Process | Source type | Source | Reference year | Data category | Share of primary data, of GWP-GHG results for A1-A3 |
|--|----------------|-----------------|----------------|---------------|---|
| Manufacturing of product | Collected data | EPD owner | 2024 | Primary data | 18% |
| Generation of electricity used in manufacturing of product | Database | Ecoinvent v3.10 | 2024 | Primary data | 0% |
| Transport of raw materials to manufacturing site | Database | Ecoinvent v3.10 | 2024 | Primary data | 2% |
| Production of raw materials | Collected data | EPD owner | 2024 | Primary data | 35% |
| Production of packaging | Database | Ecoinvent v3.10 | 2024 | Primary data | 0% |
| Total share of primary data, of GWP-GHG results for A1-A3 | | | | | 55% |

Content Declaration

The content declaration is provided as intervals due to confidentiality reasons.

| Content Name | Weight, % | Post-consumer material, weight-% of product | Biogenic material, weight-% of product | Biogenic material, kgC/declared unit |
|------------------|--------------|---|--|--------------------------------------|
| Silica Sand | 50 - 55 % | 0 | 0 | 0 |
| Cement | 15 - 20 % | 0 | 0 | 0 |
| Lime | 10 - 15 % | 0 | 0 | 0 |
| Water | 5 - 10 % | 0 | 0 | 0 |
| Reinforced steel | 5 - 10 % | 0 | 0 | 0 |
| Gypsum | 5 - 10 % | 0 | 0 | 0 |
| Aluminium Powder | <1 % | 0 | 0 | 0 |
| Total | 100 % | 0 | 0 | 0 |

Packaging Materials

| Material Name | Weight, kg | Weight-% (versus the product) | Biogenic material, kg C/declared unit |
|---------------------|--------------|-------------------------------|---------------------------------------|
| Euro pallet | 0.364 | <1 % | 0.172 |
| Steel wire wrapping | 0.045 | <1 % | 0 |
| Total | 0.409 | <1 % | 0.172 |

1 kg biogenic carbon in the product/packaging is equivalent to the uptake of 44/12 kg of CO₂.



ENVIRONMENTAL PERFORMANCE

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks

Mandatory impact category indicators according to EN 15804

Results per functional unit

| Impact category | indicators | Unit | A1-A3 | A4 | A5 | B1 | B2-B7 | C1 | C2 | C3 | C4 | D |
|--|---|-------------------------|-----------|----------|----------|-----------|----------|----------|----------|----------|----------|-----------|
| Climate change - total | GWP-total | kg CO ₂ eq. | 2.60E+02 | 7.54E+00 | 4.18E+00 | -7.21E+01 | 0.00E+00 | 3.63E+00 | 1.57E+01 | 1.53E+00 | 2.34E+00 | 1.01E+00 |
| Climate change - fossil | GWP-fossil | kg CO ₂ eq. | 2.60E+02 | 7.54E+00 | 3.55E+00 | -7.21E+01 | 0.00E+00 | 3.62E+00 | 1.57E+01 | 1.53E+00 | 2.34E+00 | 1.01E+00 |
| Climate change - biogenic | GWP-biogenic | kg CO ₂ eq. | -5.31E-01 | 1.27E-03 | 6.31E-01 | 0.00E+00 | 0.00E+00 | 2.39E-03 | 2.64E-03 | 5.91E-04 | 5.91E-04 | -6.01E-04 |
| Climate change - land use and land-use change | GWP-luluc | kg CO ₂ eq. | 3.17E-01 | 3.00E-03 | 1.17E-03 | 0.00E+00 | 0.00E+00 | 4.86E-03 | 6.22E-03 | 1.13E-03 | 1.13E-03 | -3.69E-04 |
| Ozone depletion | ODP | kg CFC 11 eq. | 1.08E-06 | 1.05E-07 | 1.43E-08 | 0.00E+00 | 0.00E+00 | 2.28E-08 | 2.18E-07 | 1.62E-08 | 6.48E-08 | 1.90E-08 |
| Acidification | AP | mol H ⁺ eq. | 1.03E+00 | 2.51E-02 | 1.18E-02 | 0.00E+00 | 0.00E+00 | 1.76E-02 | 5.22E-02 | 1.05E-02 | 1.70E-02 | 1.05E-02 |
| Eutrophication aquatic freshwater | EP-freshwater | kg P eq. | 9.29E-02 | 5.91E-04 | 6.62E-04 | 0.00E+00 | 0.00E+00 | 1.56E-03 | 1.23E-03 | 3.65E-04 | 1.83E-04 | -1.29E-04 |
| Eutrophication aquatic marine | EP-marine | kg N eq. | 1.99E-01 | 8.14E-03 | 3.17E-03 | 0.00E+00 | 0.00E+00 | 3.52E-03 | 1.69E-02 | 3.85E-03 | 6.61E-03 | 5.54E-03 |
| Eutrophication terrestrial | EP-terrestrial | mol N eq. | 2.05E+00 | 8.86E-02 | 3.48E-02 | 0.00E+00 | 0.00E+00 | 3.55E-02 | 1.84E-01 | 4.14E-02 | 7.22E-02 | 6.02E-02 |
| Photochemical ozone formation | POCP | kg NMVOC eq. | 6.30E-01 | 3.50E-02 | 1.06E-02 | 0.00E+00 | 0.00E+00 | 1.05E-02 | 7.26E-02 | 1.23E-02 | 2.53E-02 | 1.80E-02 |
| Depletion of abiotic resources - minerals and metals | ADP- minerals & metals* | kg Sb eq. | 1.63E-04 | 2.41E-05 | 9.68E-06 | 0.00E+00 | 0.00E+00 | 3.28E-06 | 5.01E-05 | 9.77E-07 | 3.39E-06 | -2.41E-06 |
| Depletion of abiotic resources - fossil fuels | ADP-fossil* | MJ, net calorific value | 1.75E+03 | 1.06E+02 | 2.39E+01 | 0.00E+00 | 0.00E+00 | 4.67E+01 | 2.19E+02 | 1.99E+01 | 5.50E+01 | 1.37E+01 |
| Water use | WDP* | m ³ | 5.74E+01 | 5.78E-01 | 8.87E-01 | 0.00E+00 | 0.00E+00 | 8.17E-01 | 1.20E+00 | 2.08E-01 | 2.34E+00 | -8.55E+00 |
| Acronyms | GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption | | | | | | | | | | | |
| General Disclaimer | It is discouraged to use the results of modules A1-A3 without considering the results of module C. | | | | | | | | | | | |
| Disclaimer 1 | The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator | | | | | | | | | | | |



ENVIRONMENTAL PERFORMANCE

Additional mandatory and voluntary impact category indicators

Results per functional unit

| Impact category | Indicator | Unit | A1-A3 | A4 | A5 | B1 | B2-B7 | C1 | C2 | C3 | C4 | D |
|-------------------------|---|------------------------|----------|----------|----------|-----------|----------|----------|----------|----------|----------|----------|
| Climate Change -GWP-GHG | GWP-GHG | kg CO ₂ eq. | 2.60E+02 | 7.54E+00 | 4.18E+00 | -7.21E+01 | 0.00E+00 | 3.62E+00 | 1.57E+01 | 1.53E+00 | 2.34E+00 | 1.01E+00 |
| Acronyms | GWP-GHG = Global warming potential greenhouse gas. | | | | | | | | | | | |
| General disclaimer | It is discouraged to use the results of modules A1-A3 without considering the results of module C. | | | | | | | | | | | |
| Disclaimer 1 | The GWP-GHG indicator is termed GWP-IOBC/GHG in the ILCD+EPD+ data format. The indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO ₂ is set to zero | | | | | | | | | | | |

Resource use indicators according to EN 15804

Results per functional unit

| Mandatory indicators | Unit | A1-A3 | A4 | A5 | B1 | B2-B7 | C1 | C2 | C3 | C4 | D |
|----------------------|---|----------|----------|-----------|----------|----------|----------|----------|----------|-----------|-----------|
| PERE | MJ. net calorific value | 1.76E+02 | 1.39E+00 | 6.78E+00 | 0.00E+00 | 0.00E+00 | 5.63E+00 | 2.88E+00 | 1.30E+00 | 5.02E-01 | -5.67E-01 |
| PERM | MJ. net calorific value | 5.49E+00 | 0.00E+00 | -5.49E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PERT | MJ. net calorific value | 1.82E+02 | 1.39E+00 | 1.30E+00 | 0.00E+00 | 0.00E+00 | 5.63E+00 | 2.88E+00 | 1.30E+00 | 5.02E-01 | -5.67E-01 |
| PENRE | MJ. net calorific value | 1.75E+03 | 1.06E+02 | 2.42E+01 | 0.00E+00 | 0.00E+00 | 4.67E+01 | 2.19E+02 | 1.99E+01 | 5.50E+01 | -7.62E+00 |
| PENRM | MJ. net calorific value | 3.62E-01 | 0.00E+00 | -3.62E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| PENRT | MJ. net calorific value | 1.75E+03 | 1.06E+02 | 2.39E+01 | 0.00E+00 | 0.00E+00 | 4.67E+01 | 2.19E+02 | 1.99E+01 | 5.50E+01 | -7.62E+00 |
| SM | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| RSF | MJ. net calorific value | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| NRSF | MJ. net calorific value | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| FW | m³ | 1.41E-02 | 2.14E-02 | 0.00E+00 | 0.00E+00 | 2.23E-02 | 2.93E-02 | 5.58E-03 | 5.47E-02 | -1.99E-01 | -1.99E-01 |
| Acronyms | PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water. | | | | | | | | | | |
| General disclaimer | It is discouraged to use the results of modules A1-A3 without considering the results of module C. | | | | | | | | | | |



ENVIRONMENTAL PERFORMANCE

Waste indicators according to EN 15804

Results per functional or declared unit

| Mandatory indicators | Unit | A1-A3 | A4 | A5 | B1 | B2-B7 | C1 | C2 | C3 | C4 | D |
|------------------------------|---|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Hazardous waste disposed | kg | 2.30E+01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Non-hazardous waste disposed | kg | 4.54E+02 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 1.51E+02 | 0.00E+00 |
| Radioactive waste disposed | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Acronyms | HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed | | | | | | | | | | |
| General disclaimer | It is discouraged to use the results of modules A1-A3 without considering the results of module C. | | | | | | | | | | |

Output flow indicators

Results per functional unit

| Mandatory indicators | Unit | A1-A3 | A4 | A5 | B1 | B2-B7 | C1 | C2 | C3 | C4 | D |
|-------------------------------|---|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| Components for re-use | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Material for recycling | kg | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 3.49E+02 | 0.00E+00 | 0.00E+00 |
| Materials for energy recovery | kg | 0.00E+00 | 0.00E+00 | 3.64E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy, electricity | MJ, net calorific value | 0.00E+00 | 0.00E+00 | 6.33E-01 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Exported energy, thermal | MJ, net calorific value | 0.00E+00 | 0.00E+00 | 1.27E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 | 0.00E+00 |
| Acronyms | CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy. | | | | | | | | | | |
| General disclaimer | It is discouraged to use the results of modules A1-A3 without considering the results of module C. | | | | | | | | | | |




VERSION HISTORY

Version History

Original version of the EPD, 2025-08-15.



References

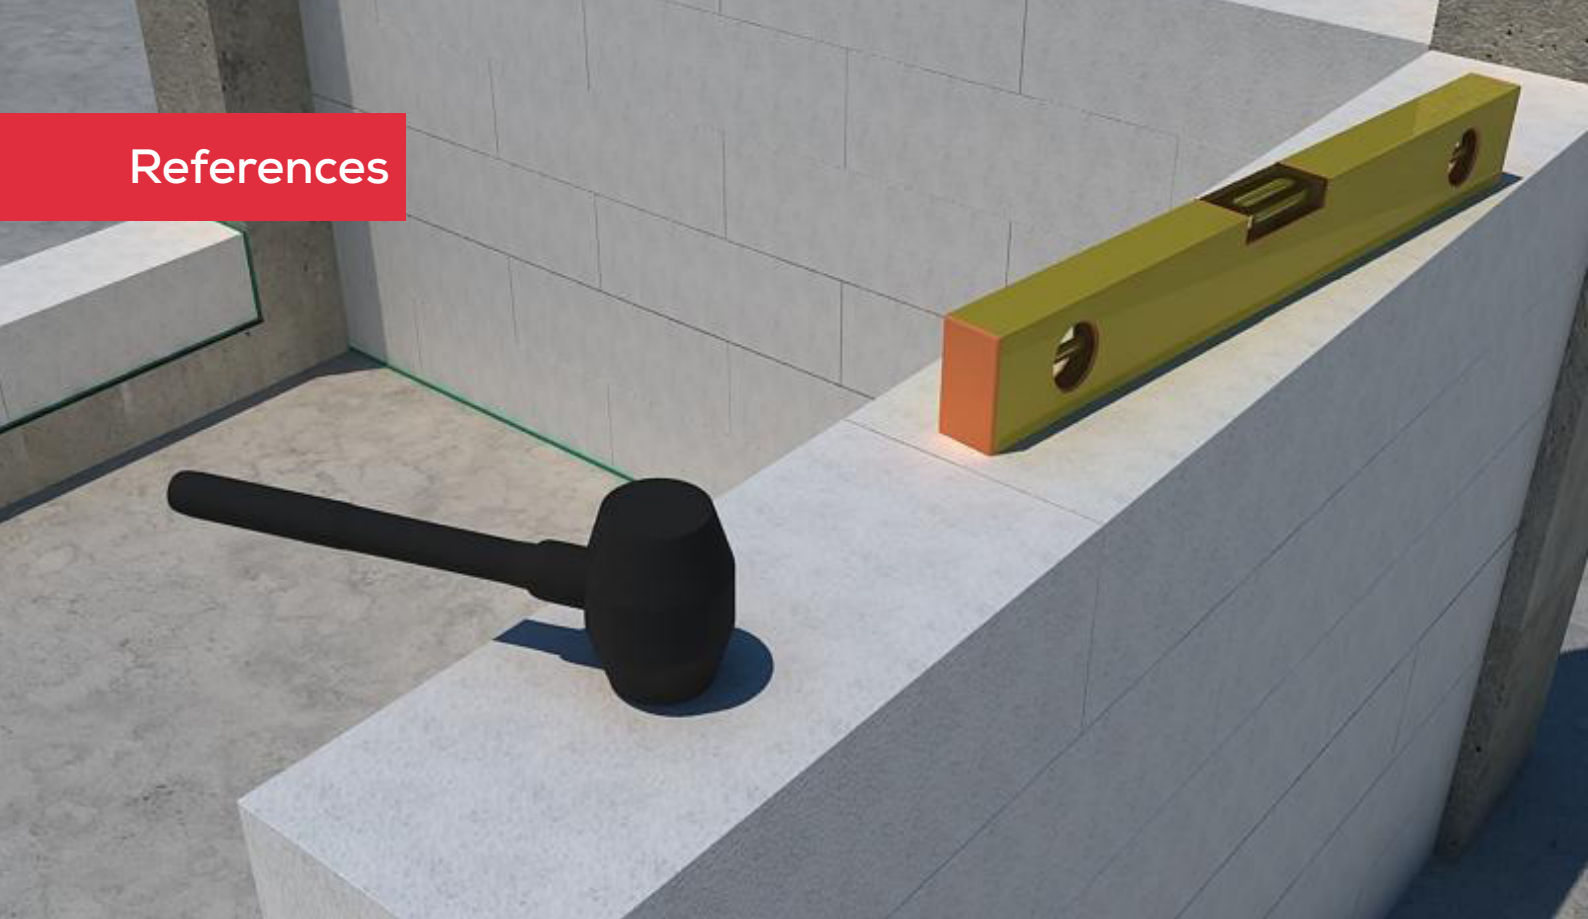

Ecoinvent / Ecoinvent Centre, www.ecoinvent.org

EN 15804:2012+A2:2019 / AC:2021 Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products

GPI / General Programme Instructions for the International EPD® System. Version 5.0.1. www.environdec.com.

ISO 14020:2000 / Environmental Labels and Declarations – General principles

ISO 14040/44 / DIN EN ISO 14040: 2006-10 / Environmental management - Life cycle assessment- Principles and framework (ISO14040:2006) and Requirements and guidelines (ISO 14044:2006)

ISO 14025 / DIN EN ISO 14025:2009-11 / Environmental labels and declarations - Type III environmental declarations - Principles and procedures

ISO 5001:2018 / Energy Management System

ISO 9001:2015 / Quality Management System

PCR for Construction Products and Construction Services / PCR 2019:14 Construction products (EN 15804:A2). Version 2.0.1. www.environdec.com.

The International EPD System / The International EPD® System is a programme for type III environmental declarations, maintaining a system to verify and register EPD®s as well as keeping a library of EPD®s and PCRs in accordance with ISO 14025. www.environdec.com

Hartmut B. Walther (2022)/ AAC Worldwide. "CO₂ Absorption During the Use Phase of Autoclaved Aerated Concrete by Recarbonation."

Nuh Yapı / www.nuhyapi.com.tr/en/

Metsims / www.metsims.com



ADDITIONAL LCA RESULTS

The table below shows the ratio of mandatory indicator results for the selected density to the minimum and maximum density values. For example, a value of 146% indicates that it is 1.46 times the representative value, while a value of 91% indicates it is 0.91 times the representative value for GWP-Total indicator.

Additional LCA results for the product range

| Mandatory indicators | Unit | Min (450 kg / m ³) | Representative (500 kg / m ³) | Max (550 kg / m ³) |
|-------------------------|------------------------|-----------------------------------|--|-----------------------------------|
| GWP-total | kg CO ₂ eq. | 91% | 2.60E+02 | 106% |
| GWP-fossil | kg CO ₂ eq. | 91% | 2.60E+02 | 106% |
| GWP-biogenic | kg CO ₂ eq. | 102% | -4.26E-01 | 98% |
| GWP-luluc | kg CO ₂ eq. | 93% | 3.17E-01 | 106% |
| ODP | kg CFC 11 eq. | 89% | 1.08E-06 | 108% |
| AP | mol H ⁺ eq. | 95% | 1.03E+00 | 104% |
| EP-freshwater | kg P eq. | 95% | 9.29E-02 | 105% |
| EP-marine | kg N eq. | 94% | 1.99E-01 | 106% |
| EP-terrestrial | mol N eq. | 93% | 2.05E+00 | 106% |
| POCP | kg NMVOC eq. | 93% | 6.30E-01 | 106% |
| ADP- minerals & metals* | kg Sb eq. | 93% | 1.63E-04 | 107% |
| ADP-fossil* | MJ | 92% | 1.75E+03 | 106% |
| WDP* | m ³ | 90% | 5.74E+01 | 110% |



ADDITIONAL LCA RESULTS

In compliance with the PCR requirements, 100% end-of-life scenarios have been modelled for the product. Tables below present the results for modules C4 and D, based on these scenarios, covering all mandatory impact indicators as specified in EN 15804.

Additional LCA results for 100% landfill scenario

| Impact category | Mandatory indicators | Unit | C4 | D |
|--|-------------------------|------------------------|----------|----------|
| Climate change - total | GWP-total | kg CO ₂ eq. | 3.13E+00 | 0.00E+00 |
| Climate change - fossil | GWP-fossil | kg CO ₂ eq. | 3.13E+00 | 0.00E+00 |
| Climate change - biogenic | GWP-biogenic | kg CO ₂ eq. | 4.02E-04 | 0.00E+00 |
| Climate change - land use and land-use change | GWP-luluc | kg CO ₂ eq. | 1.62E-03 | 0.00E+00 |
| Ozone depletion | ODP | kg CFC 11 eq. | 9.04E-08 | 0.00E+00 |
| Acidification | AP | mol H ⁺ eq. | 2.22E-02 | 0.00E+00 |
| Eutrophication aquatic freshwater | EP-freshwater | kg P eq. | 2.59E-04 | 0.00E+00 |
| Eutrophication aquatic marine | EP-marine | kg N eq. | 8.44E-03 | 0.00E+00 |
| Eutrophication terrestrial | EP-terrestrial | mol N eq. | 9.22E-02 | 0.00E+00 |
| Photochemical ozone formation | POCP | kg NMVOC eq. | 3.30E-02 | 0.00E+00 |
| Depletion of abiotic resources - minerals and metals | ADP- minerals & metals* | kg Sb eq. | 4.86E-06 | 0.00E+00 |
| Depletion of abiotic resources - fossil fuels | ADP-fossil* | MJ | 7.67E+01 | 0.00E+00 |
| Water use | WDP* | m ³ | 3.41E+00 | 0.00E+00 |

Additional LCA results for 100% recycling scenario

| Impact category | Mandatory indicators | Unit | C4 | D |
|--|-------------------------|------------------------|----------|-----------|
| Climate change - total | GWP-total | kg CO ₂ eq. | 0.00E+00 | 1.58E+00 |
| Climate change - fossil | GWP-fossil | kg CO ₂ eq. | 0.00E+00 | 1.58E+00 |
| Climate change - biogenic | GWP-biogenic | kg CO ₂ eq. | 0.00E+00 | -2.10E-03 |
| Climate change - land use and land-use change | GWP-luluc | kg CO ₂ eq. | 0.00E+00 | -1.38E-03 |
| Ozone depletion | ODP | kg CFC 11 eq. | 0.00E+00 | 3.61E-08 |
| Acidification | AP | mol H ⁺ eq. | 0.00E+00 | 1.90E-02 |
| Eutrophication aquatic freshwater | EP-freshwater | kg P eq. | 0.00E+00 | -4.83E-04 |
| Eutrophication aquatic marine | EP-marine | kg N eq. | 0.00E+00 | 1.10E-02 |
| Eutrophication terrestrial | EP-terrestrial | mol N eq. | 0.00E+00 | 1.19E-01 |
| Photochemical ozone formation | POCP | kg NMVOC eq. | 0.00E+00 | 3.56E-02 |
| Depletion of abiotic resources - minerals and metals | ADP- minerals & metals* | kg Sb eq. | 0.00E+00 | -8.66E-06 |
| Depletion of abiotic resources - fossil fuels | ADP-fossil* | MJ | 0.00E+00 | 2.23E+01 |
| Water use | WDP* | m ³ | 0.00E+00 | -2.86E+01 |



ABBREVIATIONS

| Abbreviation | Definition |
|--------------------------------|---|
| ADP | Abiotic depletion potential for fossil resources (MJ) |
| ADP-fossil | Abiotic depletion potential for non-fossil resources (kg Sb eq.) |
| ADP-minerals&metals | Acidification Potential (mol H ⁺ eq.) |
| AP | Chemical Abstracts Service Number |
| CAS No. | European Committee for Standardization |
| CEN | Chlorofluorocarbon-11 Equivalents |
| CFC-11 eq. | Components for Reuse (kg) |
| CFR | Co-location centre |
| CLC | Carbon Dioxide Equivalents |
| CO₂ eq. | Central product classification |
| CPC | European Community Number |
| EC No. | Exported Energy, Electricity (MJ) |
| EEE | Exported Energy, Thermal (MJ) |
| EET | Environmental Footprint |
| EF | European Norm (Standard) |
| EN | Eutrophication Potential |
| EP | Freshwater eutrophication potential (kg P eq.) |
| EP-freshwater | Marine eutrophication potential (kg N eq.) |
| EP-marine | Terrestrial eutrophication potential (mol N eq.) |
| EP-terrestrial | Use of net fresh water (m ³) |
| FW | Greenhouse gas |
| GHG | Globally harmonized system of classification and labelling of chemicals |
| GHS | Global |
| GLO | General Programme Instructions |
| GPI | Global Reporting Initiative |
| GRI | Global Warming Potential (kg CO ₂ eq.) |
| GWP | Global Warming Potential from biogenic sources (kg CO ₂ eq.) |
| GWP-biogenic | Global Warming Potential from fossil sources (kg CO ₂ eq.) |
| GWP-fossil | Global Warming Potential for greenhouse gases (kg CO ₂ eq.) |
| GWP-GHG | Global Warming Potential from land use and land use change (kg CO ₂ eq.) |
| GWP-luluc | Total Global Warming Potential (kg CO ₂ eq.) |



ABBREVIATIONS

| | |
|------------------------------|---|
| GWP-total | Hazardous Waste (disposed) (kg) |
| HW | International Organization for Standardization |
| ISO | Kilogram |
| kg | Kilograms of Carbon |
| kg C | Kilograms of Carbon Dioxide Equivalent |
| kg CO₂ eq. | Cubic Meter |
| m³ | Materials for Energy Recovery (kg) |
| MER | Megajoule |
| MJ | Material for Recycling (kg) |
| MR | Nitrogen Equivalents |
| N eq. | Not Declared |
| ND | Non-Hazardous Waste (disposed) (kg) |
| NHW | Non-Methane Volatile Organic Compounds |
| NMVOC | Use of non-renewable secondary fuels (MJ) |
| NRSF | Ozone Depletion Potential (kg CFC-11 eq.) |
| ODP | Phosphorus Equivalents |
| P eq. | Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials (MJ) |
| PENRE | Use of non-renewable primary energy resources used as raw materials (MJ) |
| PENRM | Total use of non-renewable primary energy resources (MJ) |
| PENRT | Use of renewable primary energy excluding renewable primary energy resources used as raw materials (MJ) |
| PERE | Use of renewable primary energy resources used as raw materials (MJ) |
| PERT | Total use of renewable primary energy resources (MJ) |
| POCP | Photochemical Ozone Creation Potential (kg NMVOC eq.) |
| RSF | Use of renewable secondary fuels (MJ) |
| RW | Radioactive Waste (disposed) (kg) |
| Sb eq. | Antimony Equivalents |
| SM | Use of secondary material (kg) |
| SVHC | Substances of Very High Concern |
| TR | Türkiye |
| WDP | Water Deprivation Potential (m ³) |



Contact Information

Programme & Programme Operator

The International EPD® System
www.environdec.com



EPD International AB Box 210 60
SE-100 31 Stockholm, Sweden
www.environdec.com
info@environdec.com

Licensee



EPD registered through fully aligned
regional licensee: EPD Türkiye
www.epdturkey.org
info@epdturkey.org
NEF 09 B Blok No:7/15, 34415
Kağıthane/İstanbul, Türkiye

Owner of the declaration



NUH YAPI ÜRÜNLERİ A.Ş.
Hacıakif Mh, Nuh Çimento Cd No:32,
41780 Körfez/Kocaeli, Türkiye

Contact person:
Mr. Ümit Emre Ün
Sustainability and Environmental
Executive
+ 90 (262) 310 50 00
Email: umit.un@nuhcimento.com.tr
www.nuhyapi.com.tr/en/

LCA and EPD consultant

METSIMS SUSTAINABILITY
CONSULTING



The United Kingdom
Clear Water Place
Oxford OX2 7NL, UK 0 800 722 0185
www.metsims.com
info@metsims.com
Türkiye
Nef 09 B Blok No:7/46-47 34415
Kağıthane/İstanbul, Türkiye
+90 212 281 13 33



