

# ENVIRONMENTAL PRODUCT DECLARATION

In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021

## 1m<sup>2</sup> 0.045 W/m.K Thermal Insulation Plate Termokup

Manufactured by Nuh Yapı Ürünleri A.Ş.

**Programme:** The International EPD System  
[www.environdec.com](http://www.environdec.com)

**Programme Operator:** EPD International AB

**Licensee:** EPD Türkiye

**EPD Registration Number:** EPD-IES-0022600

**Version Date:** 2025-08-18


**Validity Date:** 2030-08-17

**Type of EPD:** EPD of single product from a company

An EPD may be updated or  
depublished if conditions change.

To find the latest version of the  
EPD and to confirm its validity, see

[www.environdec.com](http://www.environdec.com)

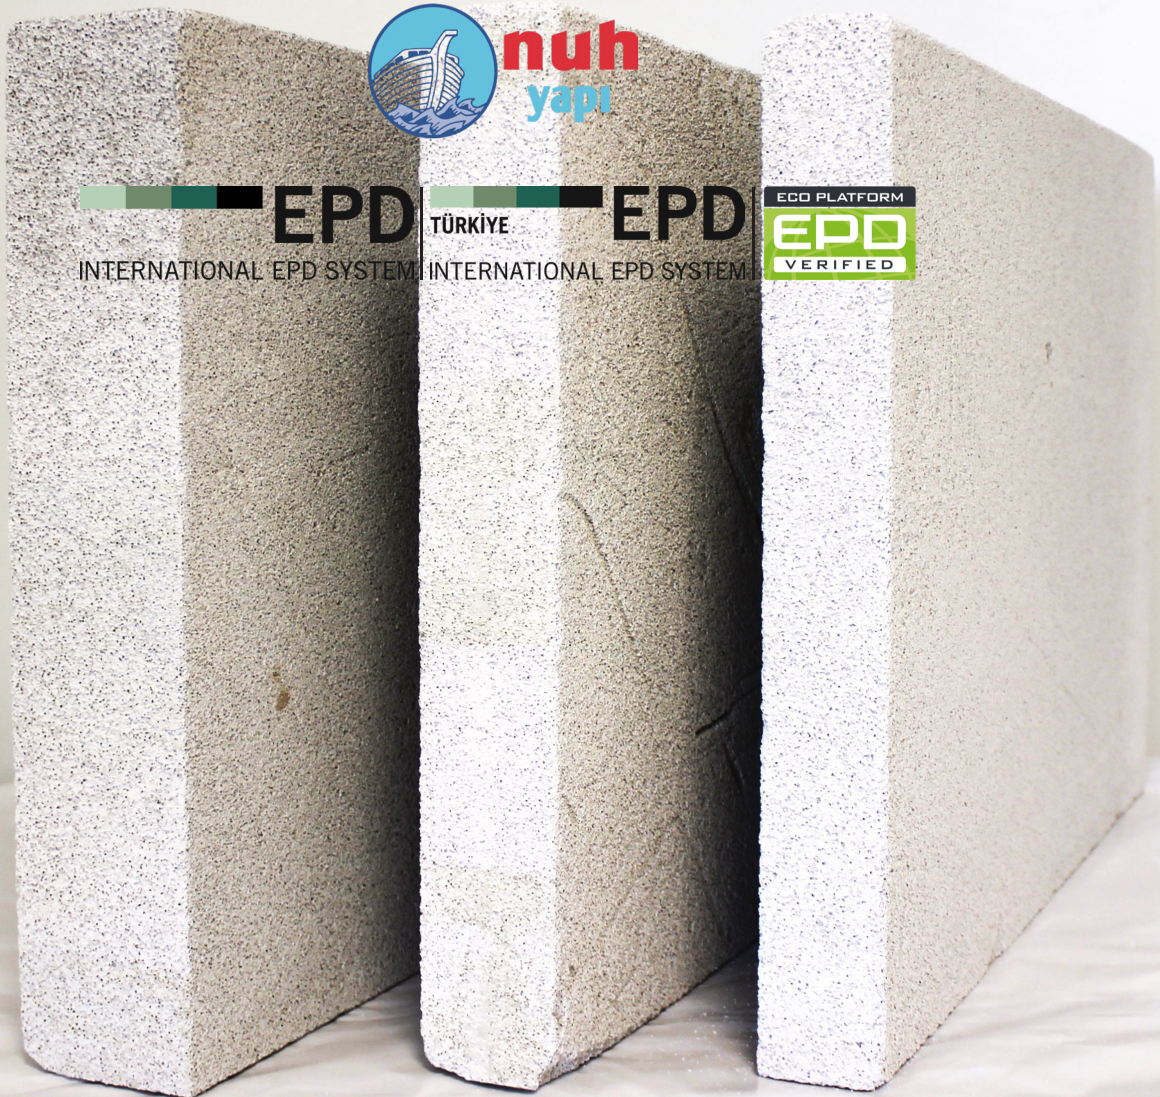



# Programme Information

The International EPD System: EPD International AB Box 210 60 SE-100 31 Stockholm, Sweden,  
support@environdec.com

EPD Türkiye: NEF 09 B Blok No:7/15, 34415 Kağıthane/İstanbul, Türkiye  
info@epdturkey.org

## CEN standard EN 15804 serve as the core Product Category Rules (PCR)

PCR 2019:14 Construction products, version 2.0.1., Construction EN 15804:2012+A2:2019/AC:2021 Sustainability of Construction Works , c-PCR-005 v1.0.0 UN CPC code is 3755: Prefabricated structural components for building or civil engineering, of cement, concrete or artificial stone

**PCR review was conducted by:** The Technical Committee of the International EPD System. A full list of members is available on [www.environdec.com](http://www.environdec.com). The review panel may be contacted via [support@environdec.com](mailto:support@environdec.com). Review Chair: Review Chair: Rob Roewette, Noa Meron.

Members of the Technical Committee were requested to state any potential conflict of interest with the PCR Committee, and if there were conflicts of interest they were excused from the review.

Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:  
x Individual EPD verification without a pre-verified LCA/EPD tool

**Third party verifier:** Stephen Forson ViridisPride

**Approved by:** The International EPD System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes                      No **X**

Nuh Yapı Ürünleri A.Ş. has the sole ownership, liability, and responsibility for this EPD.

**Life Cycle Assessment (LCA) accountability:** Furkan Can Akalın & Yıldırım Yılmaz -

Metsims Sustainability Consulting

[info@metsims.com](mailto:info@metsims.com)

EPDs within the same product category but registered in different EPD programmes may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison.

The EPD owner has the sole ownership, liability, and responsibility for this EPD.







# How to Read This EPD?

An Environmental Product Declaration (EPD) is an ISO Type III Environmental Declaration based on ISO 14025 standard. An EPD transparently reports the environmental performance of products or services from a lifecycle perspective. The preparation of an EPD includes different stages, from acquiring raw materials to the end of life of the final product/service. EPDs are based on international standards and consider the entire value chain. Additionally, EPD is a third-party verified document. This EPD includes the following sections described below.

## 1. General and Program Information

The first part of an EPD has information about the name of the manufacturer and product/service and other general information such as the validity and expiration dates of the document, the name of the program operator, geographical scope, etc. The second page states the standards followed and gives information about the program operator, third-party verifier, etc. The followed Product Category Rule (PCR) is indicated on the second page.

## 2. Company and Product/Service Information

Information about the company and the investigated product is given in this section. It summarizes the characteristics of the product provided by the manufacturer. It also includes information about the product such as product composition and packaging.

## 3. LCA Information

Life Cycle Analysis (LCA) information is one of the most important parts of the EPD as it describes the functional/declared unit, time representativeness of the study, database(s) and LCA software, along with system boundaries. The table presented in this part has columns for each stage in the life cycle. The considered stages are marked 'X' whereas the ones that are not considered are labeled as 'ND' (Not Declared). Not all EPDs consider the full life cycle assessment for a product's entire life stages. The 'System Boundary' page is also the place where one can find detailed information about the stages and the assumptions made.

## 4. LCA Results

The results of the LCA analysis are presented in table format. The first column in each table indicates the name of the impact category and their measurement units are presented in the second column. These tables show an amount at each life cycle stage to see the impact of different indicators on different stages. Each impact can be understood as what is released through the production of the declared unit of the material. The benefits of reuse/recycling of the declared product are reflected in this section.

The first impact in the table is global warming potential (GWP), which shows how much CO<sub>2</sub> is released at each stage. Other impacts include eutrophication potential, acidification potential, ozone layer depletion, land use related impacts, etc. The second table provides results for resource use and the third table is about the waste produced during production. The fourth and final table shows the results for the GWP-GHG indicator, which is almost equivalent to the GWP-Total indicator mentioned previously. The only difference is that this indicator excludes the biogenic carbon content by following a certain methodology.





## About the Company



**Owner of the EPD:** Nuh Yapı Ürünleri A.Ş.

**Production Plant:** Hacı Akif Mh.Nuh Çimento Cd. No:32 Hereke / KOCAELİ - TÜRKİYE

Nuh Yapı Ürünleri A.Ş. was established in 1995 in Hereke, Kocaeli, as a subsidiary of the Nuh Cement Group. The company initially started operations in the construction sector with the production of lime and autoclaved aerated concrete (AAC). Over time, it has expanded its product range in response to evolving market demands and R&D efforts.

Today, the company operates across various sectors including iron and steel, aluminum, chemicals, mining, paper, energy, water treatment, wastewater treatment, agriculture, and dental gypsum production. Through R&D projects supported by TÜBİTAK TEYDEP, the company developed thermal insulation boards from AAC and established a production process for aluminum paste, a key raw material in AAC manufacturing.

With its patented Alpha Gypsum Process, developed internally and protected by a detailed (examination-based) patent, Nuh Yapı Ürünleri manufactures and markets alpha gypsum domestically and internationally. Within the magnesium product line, the company has developed a petroleum coke combustion aid additive, which helps eliminate operational bottlenecks in cement kilns, thereby increasing production capacity and reducing shutdowns for cleaning.

As of 2024, Nuh Yapı Ürünleri has also introduced a new product line for dental gypsum, expanding its innovation-driven approach into the healthcare field.







### Product Description:

Termokup is lightweight, robust, and solid mineral-based thermal insulation materials and also thermal conductivity value is 0.045 W/mK. it increases the energy efficiency of buildings with high thermal insulation and energy savings. This product can be applied for the purpose of thermal insulation of buildings as both the outer and inner surface and also it uses for old and new buildings.

### Applications:

- \* For Thermal insulation of the exterior concrete surfaces of the new buildings.
- \* For thermal insulation of the exterior façade for the old and new buildings.
- \* Thermal insulation of roof, terrace, the basement and the ceiling of the garage.

### Advantages:

- High thermal insulation
- Fireproof
- Open for vapour diffusion
- Light
- Easy to apply
- Quick application
- Open for vapour diffusion
- Durable

### Technical Specifications

Technical Characteristic	Value	Unit
Fire Class	A1	-
Short Term Water Absorption	Max 15	kg/m <sup>2</sup>
Long Term Water Absorption	Max 20	kg/m <sup>2</sup>
Vapor Permeability	Max 5	μ
Thermal Conductivity	0.045	W/m.K
The Size Deviation	2	mm/m
Density	Max 150	kg/m <sup>3</sup>
Behavior Under Point Load	4679	Newton
Compressive Strength	≥400	kPa
Tensile Strength Perpendicular T o The Surface	180	kPa
Plexural Strength	Min 150	kPa
Other Features	- Bacteria, fungi, insects and deterioration does not occur. - it does not give off noxious gases during fire	





# System Boundaries & Description

## A1 - Raw Material Supply

This stage covers the extraction, processing, and pre-treatment of raw materials prior to their delivery to the manufacturing site. The environmental impacts associated with raw materials such as cement, lime, aluminum powder, water, and quartzite in the production of thermally insulating autoclaved aerated concrete (AAC) panels (Termokup) are evaluated at this stage.

In order to reduce the consumption of virgin raw materials, alternative inputs such as waste-derived sands from ceramic production and ground granulated blast furnace slag (GGBFS) are partially used as substitutes. Additionally, fresh (uncured) AAC slurry is reintroduced into the production process, and broken cured AAC panels are also collected and reused in the raw mix formulation. These internal recycling practices contribute to minimizing raw material demand and reducing environmental impacts associated with resource extraction and material processing.

## A2 - Raw Material Transport


Transport information for raw materials is supplied by the manufacturer, including distance and transport mode details. Based on this data, the environmental impacts associated with the transportation of raw materials to the production site are calculated, considering both routes and transportation types (e.g., road, rail, or sea). All raw materials and packaging used in the product were supplied domestically by road.

Transport Mode	Type
Road	Vehicle: Lorry Size Class: 16-32 metric ton Emission Standard: EURO6 Fuel Type: Diesel

## A3 - Manufacturing

This stage includes all processes associated with the manufacturing of Termoküp insulation panels, from raw material input to the point at which the product is ready for dispatch. Energy-related inputs such as electricity and steam are based on data provided directly by the manufacturer. At Nuh Yapı, both electricity and steam are consumed during production, with steam being generated on-site using coal as the main energy source.

The production process involves material preparation, mixing, molding, pre-curing, cutting, high-pressure steam curing, and final finishing operations. As the product does not contain any embedded reinforcement, no metalworking or steel-related activities are involved. Packaging materials used to protect the panels during transport and storage are also included in the environmental calculations for this stage.

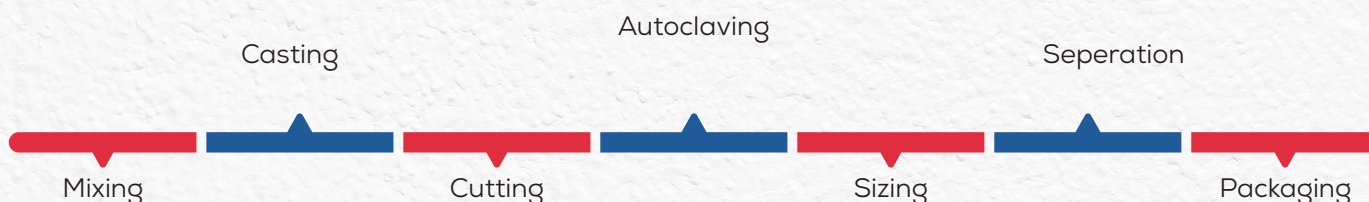



# System Boundaries & Description

Scenarios used are realistic and representative of one of the most probable alternatives and shall not include processes or procedures that are not in current use, or which have not been demonstrated to be practical. (For module A4, A5, B1-B7, C1-C4, & D)

## A4 - Product Transport

This stage includes the transportation of the finished product from the manufacturing facility to the customer. Transport distances and routes are determined based on information provided by the manufacturer. Depending on the customer's location, the product is primarily delivered by road (truck), rail, or seaway. While the main transport mode is typically road, rail and maritime transport are also used where applicable. The environmental impacts of these transport activities are calculated based on transport type, distance traveled, and payload.

Transport Mode	Type
Road	Vehicle: Lorry
	Size Class: 16-32 metric ton
	Emission Standard: EURO6
	Fuel Type: Diesel

## A5 - Installation

This stage represents the environmental impacts related to the installation of Termokup insulation panels on-site. A worst-case scenario has been assumed to reflect the maximum expected material and resource use, particularly for exterior wall applications. In this scenario, 5 kg of cement-based adhesive, 4 kg of plastic dowels, 4.5 kg of mineral-based exterior plaster, and 1.7 kg of alkali-resistant fiberglass mesh are used per square meter of installed product. Packaging waste such as plastic wraps, strapping, and pallets is also considered in this module. This scenario reflects a conservative approach to environmental modeling and may vary in interior applications or controlled conditions where material use and losses are likely to be lower.

## B1 - Use

During the use phase, the cement and lime content within Termokup, both containing calcium oxide (CaO), contribute to the absorption of carbon dioxide (CO<sub>2</sub>) from the atmosphere via the natural carbonation process. Theoretical CO<sub>2</sub> uptake over the product's service life is estimated based on the CaO content, following the methodology described in Hartmut B. Walther (2022). A recarbonation rate of 85% over a 50-year period is assumed in this assessment.

$$CO_2 \text{ absorption rate} = (Cement \text{ in the product}(kg) \times Cement \text{ CaO rate}(\%)) + (Lime \text{ in the product}(kg) \times Lime \text{ CaO rate}(\%)) \times \frac{CO_2 MW(\frac{g}{mol})}{CaO MW(\frac{g}{mol})}$$

CaO ratio in cement (%)	65
CaO ratio in lime (%)	80
CO <sub>2</sub> molecular weight (g/mol)	44
CaO molecular weight (g/mol)	56
Service year (year)	50
CO <sub>2</sub> absorption rate	45.4
CO <sub>2</sub> absorption rate 85% recarbonation rate	38.6





# System Boundaries & Description

## B2 – Maintenance

Termokups are inherently durable and stable, requiring no maintenance throughout their service life. Therefore, this module does not contribute any environmental impacts.

## B3 – Repair

Due to their structural integrity and resistance to common forms of degradation, Termokups do not require repair during their use phase. As a result, no environmental burdens are associated with this stage.

## B4 – Replacement

The longevity of Termokups eliminates the need for replacement under normal use conditions. Hence, this module is considered to have no impact.

## B5 – Refurbishment

Refurbishment activities are not applicable to Termokups, as the material maintains its performance without the need for renewal or upgrade. No related environmental impact is reported in this module.

## B6 – Operational Energy Use

Termokups function as passive construction elements and do not require any operational energy input during their use. Accordingly, no energy-related emissions or impacts are assigned to this phase.

## B7 – Operational Water Use

There is no operational water demand associated with Termokups. The material does not require water during its use phase, and thus this module does not contribute to water-related environmental impacts.

## C1 – Demolition

The energy required for the demolition or deconstruction of the Termokups is estimated at 10 kWh diesel per ton of product according to PCR 2019:14 v2.0.0. Accordingly, for a reference product weight of 5.6 kg, a total of 0.56 kWh of diesel is assumed to be consumed during demolition.

## C2 – Waste Transport

This stage covers the transportation of the demolished material to a disposal or recycling facility. An average transport distance of 80 km by truck with 50% load factor is assumed according to PCR 2019:14 v2.0.0. The transport parameters used in the calculation are as follows:

Transport Mode	Type
Vehicle Type	Vehicle: Lorry
	Size Class: 16-32 metric ton
	Emission Standard: EURO5
	Fuel Type: Diesel %50 ekle
Distance	100 km





# System Boundaries & Description

## C3 - Waste Processing

This stage covers the activities involved in the treatment of the product after its demolition and prior to its final disposal or recovery. In this study, it is assumed that Termokup waste is sorted to enable potential recycling or material recovery. If recycling is feasible, the Termokup material can be crushed and repurposed, for example, as a secondary aggregate in new construction applications. The environmental impacts associated with these processing steps are calculated based on the technologies employed and the efficiency of the recovery systems used.

## C4 - Disposal

At this stage, the final fate of the product is determined. It is assumed that a portion of the Termokup waste is recycled, substituting natural aggregate in concrete production. In line with data from the Cement Sustainability Initiative (CSI), a substitution rate of 30% is applied in this study, while the remaining 70% of the product is considered to be landfilled. The environmental impacts related to landfilling – including emissions from decomposition and loss of material value – are calculated accordingly.

## D - Reuse, recovery, or recycling potential

This module quantifies the potential environmental benefits associated with reusing or recycling the product after its end-of-life. The recycled Termokup material, when used as a partial replacement for natural aggregates in concrete production, contributes to resource conservation and reduction of associated emissions. In this study, a 30% substitution rate is assumed, and the resulting environmental benefits are allocated to this module. These benefits include avoided raw material extraction, reduced processing impacts, and a contribution to overall waste minimization in future production cycles.





# LCA Information

**Declared unit:** 1m<sup>2</sup> 0.045 W/m.K 23.5 λ Thermal Insulation Plate Termokup produced by Nuh Yapı. (5.6 kg)

**Conversion factor:** 0.1786 m<sup>2</sup> / kg

**Time representativeness:** Full year of 2024 (2024-01-01 to 2024-12-31).

**Database(s) and LCA software:** Ecoinvent 3.10 and SimaPro 9.6

## Geographical scope:

Module A1 and A2 Material suppliers are located in Türkiye (TR)


Module A3 production is located in Türkiye (TR)

Module A4 transport locations are Global (Türkiye, European)

Module A5, B, C and D scenarios are for Global

**Description of system boundaries:** Cradle to grave and module D (A + B + C + D)

## Process flow diagram:

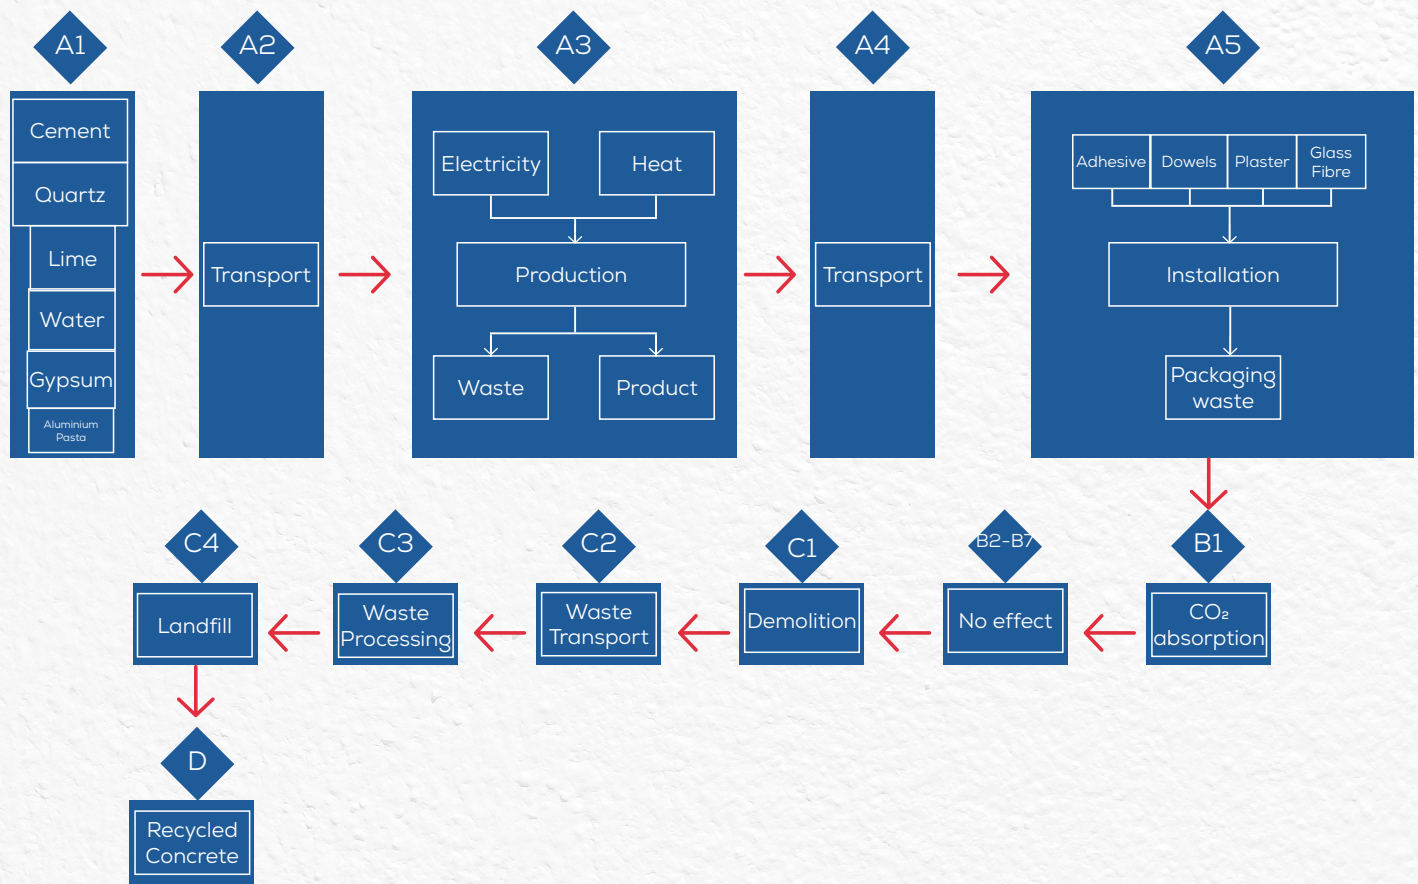

## Source of Electricity

The electricity data modelled for the production processes is taken from Ecoinvent 3.10 dataset that represents medium voltage electricity production in Türkiye with the reference year, 2021. The dataset consist the following production percentages for electricity. Coal, 37%, Hydro, 33%, Natural gas, 17 %, Wind, 8%, Geothermal, 3%, Biogas, 1%, Other, 1%, Biomass, <1%. The Climate impact (GWP-GHG) impact of the electricity is 0.575 kg CO<sub>2</sub> eq. / kWh.

## Allocation

Source of raw material, water consumption, energy consumption and raw material transportation were weighted according to 2024 production figures. In addition, hazardous and non-hazardous waste amounts were also allocated from the 2024 total waste generation.





# LCA Information

	Product Stage			Construction Process Stage		Use Stage							End of Life Stage				Resource recovery stage
	Raw Material Supply	Transport	Manufacturing	Transport	Construction Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational Energy Use	Operational Water Use	Deconstruction / Demolition	Transport	Waste Processing	Disposal	Reuse-Recovery-Recycling-potential
Module	A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Modules Declared	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Geography	TR	TR	TR	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO	GLO
Share of specific data	80%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - Products	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation - Sites	0%			-	-	-	-	-	-	-	-	-	-	-	-	-	-

(ND = Not declared, X = Module included)

## Cut-Off Criteria

The criteria for exclusion were set so that individual input flows less than 1% of the total, with a cumulative limit of less than 5%, could be omitted. This was contingent upon confirming that these excluded flows did not significantly alter the reported data, with "significant" defined as affecting the total by less than 5%.

## REACH Regulation

No substances included in the Candidate List of Substances of Very High Concern for authorization under the REACH regulations are present in this product either above the threshold for registration with the European Chemicals Agency or above 0.1% (wt/wt).

## Reference Service Life (RSL)

The service life of termokup insulation plate is generally considered to be approximately 50 years under proper use and maintenance conditions. Unless exceptional circumstances occur, they maintain their durability and functionality throughout this period.

## Background Data

For all LCA modelling and calculation, Ecoinvent database (v3.10) and SimaPro (v9.6) LCA software were used. Characterization factors of EN 15804 reference package based on EF 3.1 are utilized. Impact of infrastructure and capital goods are excluded from the analysis.

## LCA Modelling and Calculation

The results of the LCA with the indicators as per EPD requirement are given in the LCA result tables. All energy calculations were obtained using Cumulative Energy Demand (LHV) methodology, while fresh water use is calculated with selected inventory flows in SimaPro according to the PCR. There are no co-product allocations within the LCA study underlying this EPD. The regional energy datasets were used for all energy calculations.





# LCA Information

## Data Quality

The EPD is based on data collected by Nuh Yapı from one site over one year from January 2024. The EPD is representative of the production of Termokup. The use and end-of-life stage of the EPD covers mostly Europe. Background data was sourced from the Ecoinvent 3.10 database. No fair, poor or very poor data was found during the assessment of relevant data using EN 15804:2012+A2:2019, Annex E, only E.2.

Process	Source type	Source	Reference year	Data category	Share of primary data, of GWP-GHG results for A1-A3
Manufacturing of product	Collected data	EPD owner	2024	Primary data	29%
Generation of electricity used in manufacturing of product	Database	Ecoinvent v3.10	2024	Primary data	0%
Transport of raw materials to manufacturing site	Database	Ecoinvent v3.10	2024	Primary data	0.04%
Production of raw materials	Collected data	EPD owner	2024	Primary data	51%
Production of packaging	Database	Ecoinvent v3.10	2024	Primary data	0%
<b>Total share of primary data, of GWP-GHG results for A1-A3</b>					<b>80%</b>

## Content Declaration

The content declaration is provided as intervals due to confidentiality reasons.

Content Name	Weight, %	Post-consumer material, weight-% of product	Biogenic material, weight-% of product	Biogenic material, kgC/declared unit
Cement	50 – 55 %	0	0	0
Quartz	25 – 25 %	0	0	0
Lime	5 – 10 %	0	0	0
Water	5 – 10 %	0	0	0
Gypsum	5 – 10 %	0	0	0
Aluminium Powder	<1 %	0	0	0
<b>Total</b>	<b>100 %</b>	<b>0</b>	<b>0</b>	<b>0</b>

## Packaging Materials

Material Name	Weight, kg	Weight-% (versus the product)	Biogenic material, kg C/ declared unit
Euro pallet	0.004	<1 %	0.0019
Polypropylene Film	0.01	<1 %	0
<b>Total</b>	<b>0.014</b>	<b>&lt;1 %</b>	<b>0.0019</b>

1 kg biogenic carbon in the product/packaging is equivalent to the uptake of 44/12 kg of CO<sub>2</sub>.





# ENVIRONMENTAL PERFORMANCE

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks

## Mandatory impact category indicators according to EN 15804

Results per functional unit

Impact category	Indicators	Unit	A1-A3	A4	A5	B1	B2-B7	C1	C2	C3	C4	D
Climate change - total	GWP-total	kg CO <sub>2</sub> eq.	5.49E+00	2.47E+00	1.24E+01	-1.54E+00	0.00E+00	4.06E-02	1.75E-01	1.66E-02	2.78E-02	4.26E-05
Climate change - fossil	GWP-fossil	kg CO <sub>2</sub> eq.	5.68E+00	2.47E+00	1.22E+01	-1.54E+00	0.00E+00	4.05E-02	1.75E-01	1.66E-02	2.77E-02	5.61E-05
Climate change - biogenic	GWP-biogenic	kg CO <sub>2</sub> eq.	-1.95E-01	4.17E-04	2.65E-01	0.00E+00	0.00E+00	2.68E-05	2.96E-05	6.57E-06	6.86E-06	-8.13E-06
Climate change - land use and land-use change	GWP-luluc	kg CO <sub>2</sub> eq.	6.50E-03	9.80E-04	8.75E-03	0.00E+00	0.00E+00	5.44E-05	6.97E-05	1.26E-05	1.30E-05	-5.38E-06
Ozone depletion	ODP	kg CFC 11 eq.	1.77E-08	3.44E-08	1.90E-07	0.00E+00	0.00E+00	2.55E-10	2.45E-09	1.74E-10	7.58E-10	4.30E-11
Acidification	AP	mol H <sup>+</sup> eq.	2.90E-02	8.22E-03	7.32E-02	0.00E+00	0.00E+00	1.97E-04	5.85E-04	1.13E-04	2.03E-04	1.73E-05
Eutrophication aquatic freshwater	EP-freshwater	kg P eq.	2.53E-03	1.93E-04	3.45E-03	0.00E+00	0.00E+00	1.75E-05	1.37E-05	4.07E-06	2.13E-06	-1.87E-06
Eutrophication aquatic marine	EP-marine	kg N eq.	4.86E-03	2.66E-03	1.35E-02	0.00E+00	0.00E+00	3.94E-05	1.89E-04	4.08E-05	7.97E-05	1.58E-05
Eutrophication terrestrial	EP-terrestrial	mol N eq.	4.94E-02	2.90E-02	1.42E-01	0.00E+00	0.00E+00	3.97E-04	2.06E-03	4.39E-04	8.71E-04	1.68E-04
Photochemical ozone formation	POCP	kg NMVOC eq.	1.46E-02	1.14E-02	5.14E-02	0.00E+00	0.00E+00	1.18E-04	8.13E-04	1.31E-04	3.03E-04	5.03E-05
Depletion of abiotic resources - minerals and metals	ADP- minerals & metals*	kg Sb eq.	3.51E-06	7.89E-06	4.13E-04	0.00E+00	0.00E+00	3.67E-08	5.61E-07	1.07E-08	3.92E-08	-3.26E-08
Depletion of abiotic resources - fossil fuels	ADP-fossil*	MJ, net calorific value	3.81E+01	3.46E+01	1.62E+02	0.00E+00	0.00E+00	5.23E-01	2.46E+00	2.15E-01	6.43E-01	6.35E-03
Water use	WDP*	m³	8.62E-01	1.89E-01	4.80E+00	0.00E+00	0.00E+00	9.15E-03	1.34E-02	2.31E-03	2.69E-02	-1.01E-01
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption											
General Disclaimer	It is discouraged to use the results of modules A1-A3 without considering the results of module C.											
Disclaimer 1	The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator											





# ENVIRONMENTAL PERFORMANCE

## Additional mandatory and voluntary impact category indicators

Results per functional unit

Impact category	Indicator	Unit	A1-A3	A4	A5	B1	B2-B7	C1	C2	C3	C4	D
Climate Change -GWP-GHG	GWP-GHG	kg CO <sub>2</sub> eq.	5.49E+00	2.47E+00	1.24E+01	-1.54E+00	0.00E+00	4.06E-02	1.75E-01	1.66E-02	2.78E-02	5.08E-05
Acronyms	GWP-GHG = Global warming potential greenhouse gas.											
General disclaimer	It is discouraged to use the results of modules A1-A3 without considering the results of module C.											
Disclaimer 1	The GWP-GHG indicator is termed GWP-IOBC/GHG in the ILCD+EPD+ data format. The indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO <sub>2</sub> is set to zero											

## Resource use indicators according to EN 15804

Results per functional unit

Mandatory indicators	Unit	A1-A3	A4	A5	B1	B2-B7	C1	C2	C3	C4	D
PERE	MJ, net calorific value	3.39E+00	4.54E-01	1.15E+01	0.00E+00	0.00E+00	6.30E-02	3.23E-02	1.45E-02	5.83E-03	-6.10E-03
PERM	MJ, net calorific value	6.86E-02	0.00E+00	-6.86E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ, net calorific value	3.46E+00	4.54E-01	1.15E+01	0.00E+00	0.00E+00	6.30E-02	3.23E-02	1.45E-02	5.83E-03	-6.10E-03
PENRE	MJ, net calorific value	3.77E+01	3.46E+01	1.63E+02	0.00E+00	0.00E+00	5.23E-01	2.46E+00	2.15E-01	6.43E-01	6.35E-03
PENRM	MJ, net calorific value	3.32E-01	0.00E+00	-3.32E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ, net calorific value	3.81E+01	3.46E+01	1.62E+02	0.00E+00	0.00E+00	5.23E-01	2.46E+00	2.15E-01	6.43E-01	6.35E-03
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ, net calorific value	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m <sup>3</sup>	2.14E-02	4.62E-03	1.17E-01	0.00E+00	0.00E+00	2.49E-04	3.29E-04	6.20E-05	6.29E-04	-2.36E-03
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water.										
General disclaimer	It is discouraged to use the results of modules A1-A3 without considering the results of module C.										





# ENVIRONMENTAL PERFORMANCE

## Waste indicators according to EN 15804

Results per functional or declared unit

Mandatory indicators	Unit	A1-A3	A4	A5	B1	B2-B7	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3,61E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Non-hazardous waste disposed	kg	1,24E+01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,92E+00	0,00E+00
Radioactive waste disposed	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	HWD = Hazardous waste disposed; NHWD = Non-hazardous waste disposed; RWD = Radioactive waste disposed										
General disclaimer	It is discouraged to use the results of modules A1-A3 without considering the results of module C.										

## Output flow indicators

Results per functional unit

Mandatory indicators	Unit	A1-A3	A4	A5	B1	B2-B7	C1	C2	C3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,68E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	4,00E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ, net calorific value	0,00E+00	0,00E+00	6,96E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, thermal	MJ, net calorific value	0,00E+00	0,00E+00	1,40E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Acronyms	CRU = Components for re-use; MFR = Materials for recycling; MER = Materials for energy recovery; EEE = Exported electrical energy; EET = Exported thermal energy.										
General disclaimer	It is discouraged to use the results of modules A1-A3 without considering the results of module C.										





# VERSION HISTORY


## Version History

Original version of the EPD, 2025-08-15.





## References

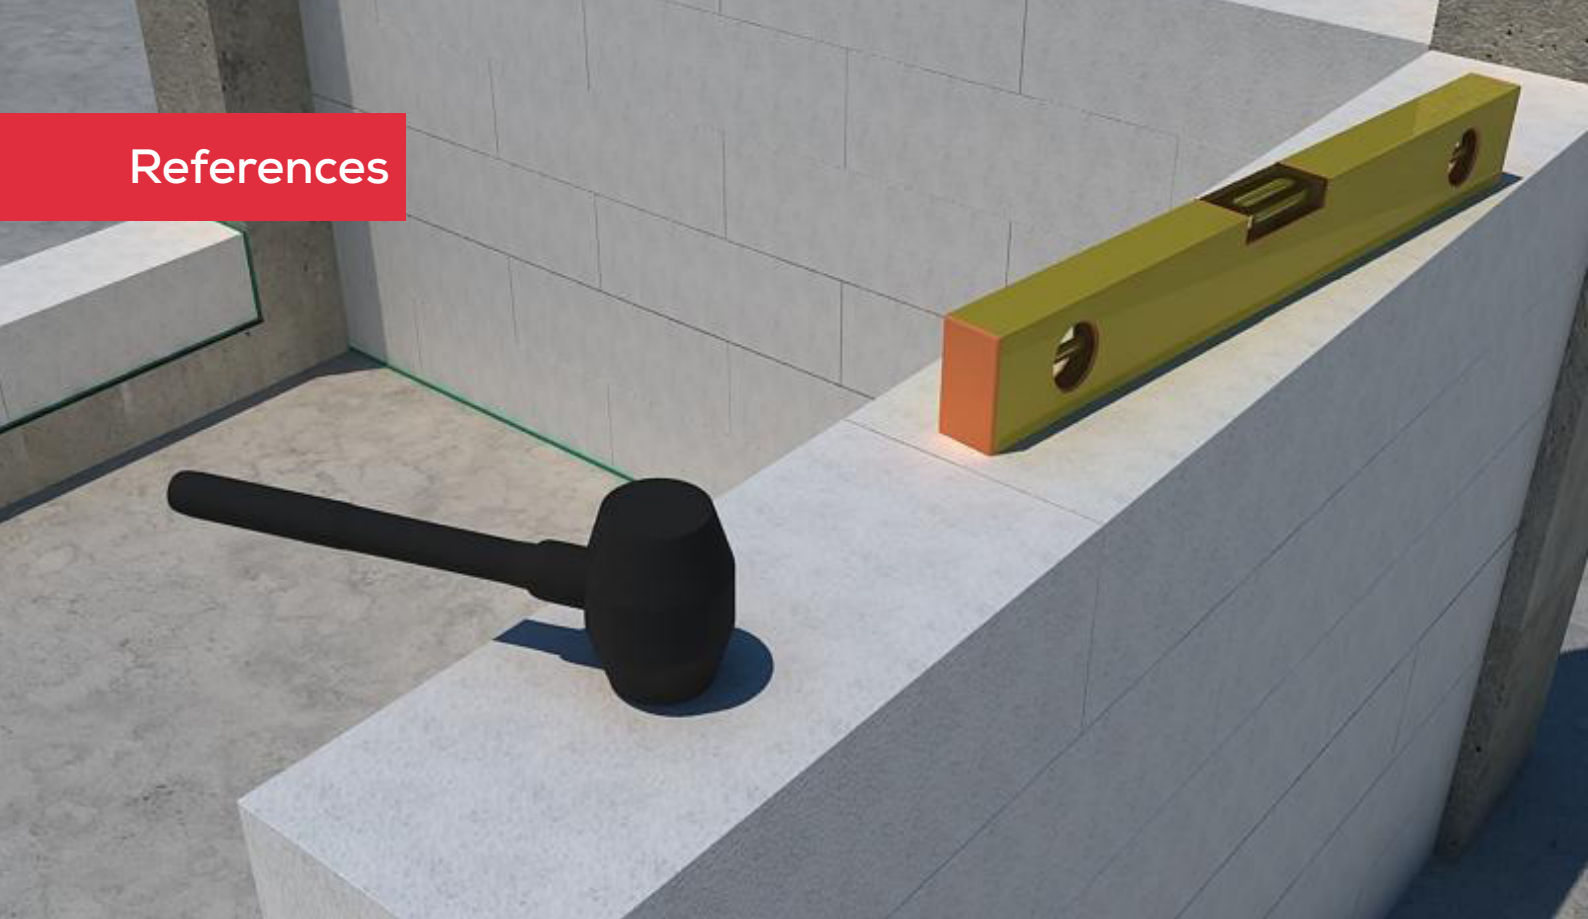

**Ecoinvent** / Ecoinvent Centre, [www.ecoinvent.org](http://www.ecoinvent.org)

**EN 15804:2012+A2:2019 / AC:2021** Sustainability of construction works - Environmental Product Declarations - Core rules for the product category of construction products

**GPI** / General Programme Instructions for the International EPD® System. Version 5.0.1. [www.environdec.com](http://www.environdec.com).

**ISO 14020:2000** / Environmental Labels and Declarations – General principles

**ISO 14040/44 / DIN EN ISO 14040: 2006-10 /** Environmental management - Life cycle assessment- Principles and framework (ISO14040:2006) and Requirements and guidelines (ISO 14044:2006)

**ISO 14025 / DIN EN ISO 14025:2009-11** / Environmental labels and declarations - Type III environmental declarations - Principles and procedures

**ISO 5001:2018** / Energy Management System

**ISO 9001:2015** / Quality Management System

**PCR for Construction Products and Construction Services** / PCR 2019:14 Construction products (EN 15804:A2). Version 2.0.1. [www.environdec.com](http://www.environdec.com).

**The International EPD System** / The International EPD® System is a programme for type III environmental declarations, maintaining a system to verify and register EPD®s as well as keeping a library of EPD®s and PCRs in accordance with ISO 14025. [www.environdec.com](http://www.environdec.com)

**Hartmut B. Walther (2022)**/ AAC Worldwide. "CO<sub>2</sub> Absorption During the Use Phase of Autoclaved Aerated Concrete by Recarbonation."

**Nuh Yapı** / [www.nuhyapi.com.tr/en/](http://www.nuhyapi.com.tr/en/)

**Metsims** / [www.metsims.com](http://www.metsims.com)





# ADDITIONAL LCA RESULTS

In compliance with the PCR requirements, 100% end-of-life scenarios have been modelled for the product. Tables below present the results for modules C4 and D, based on these scenarios, covering all mandatory impact indicators as specified in EN 15804.

## Additional LCA results for 100% landfill scenario

Impact category	Mandatory indicators	Unit	C4	D
Climate change - total	GWP-total	kg CO <sub>2</sub> eq.	3.50E-02	0.00E+00
Climate change - fossil	GWP-fossil	kg CO <sub>2</sub> eq.	3.50E-02	0.00E+00
Climate change - biogenic	GWP-biogenic	kg CO <sub>2</sub> eq.	4.51E-06	0.00E+00
Climate change - land use and land-use change	GWP-luluc	kg CO <sub>2</sub> eq.	1.82E-05	0.00E+00
Ozone depletion	ODP	kg CFC 11 eq.	1.01E-09	0.00E+00
Acidification	AP	mol H <sup>+</sup> eq.	2.48E-04	0.00E+00
Eutrophication aquatic freshwater	EP-freshwater	kg P eq.	2.91E-06	0.00E+00
Eutrophication aquatic marine	EP-marine	kg N eq.	9.45E-05	0.00E+00
Eutrophication terrestrial	EP-terrestrial	mol N eq.	1.03E-03	0.00E+00
Photochemical ozone formation	POCP	kg NMVOC eq.	3.70E-04	0.00E+00
Depletion of abiotic resources - minerals and metals	ADP- minerals & metals*	kg Sb eq.	5.44E-08	0.00E+00
Depletion of abiotic resources - fossil fuels	ADP-fossil*	MJ	8.59E-01	0.00E+00
Water use	WDP*	m <sup>3</sup>	3.82E-02	0.00E+00

## Additional LCA results for 100% recycling scenario

Impact category	Mandatory indicators	Unit	C4	D
Climate change - total	GWP-total	kg CO <sub>2</sub> eq.	0.00E+00	1.42E-04
Climate change - fossil	GWP-fossil	kg CO <sub>2</sub> eq.	0.00E+00	1.87E-04
Climate change - biogenic	GWP-biogenic	kg CO <sub>2</sub> eq.	0.00E+00	-2.68E-05
Climate change - land use and land-use change	GWP-luluc	kg CO <sub>2</sub> eq.	0.00E+00	-1.79E-05
Ozone depletion	ODP	kg CFC 11 eq.	0.00E+00	1.43E-10
Acidification	AP	mol H <sup>+</sup> eq.	0.00E+00	5.76E-05
Eutrophication aquatic freshwater	EP-freshwater	kg P eq.	0.00E+00	-6.23E-06
Eutrophication aquatic marine	EP-marine	kg N eq.	0.00E+00	5.26E-05
Eutrophication terrestrial	EP-terrestrial	mol N eq.	0.00E+00	5.60E-04
Photochemical ozone formation	POCP	kg NMVOC eq.	0.00E+00	1.68E-04
Depletion of abiotic resources - minerals and metals	ADP- minerals & metals*	kg Sb eq.	0.00E+00	-1.09E-07
Depletion of abiotic resources - fossil fuels	ADP-fossil*	MJ	0.00E+00	2.12E-02
Water use	WDP*	m <sup>3</sup>	0.00E+00	-3.37E-01





# ABBREVIATIONS

Abbreviation	Definition
<b>ADP</b>	Abiotic depletion potential for fossil resources (MJ)
<b>ADP-fossil</b>	Abiotic depletion potential for non-fossil resources (kg Sb eq.)
<b>ADP-minerals&amp;metals</b>	Acidification Potential (mol H <sup>+</sup> eq.)
<b>AP</b>	Chemical Abstracts Service Number
<b>CAS No.</b>	European Committee for Standardization
<b>CEN</b>	Chlorofluorocarbon-11 Equivalents
<b>CFC-11 eq.</b>	Components for Reuse (kg)
<b>CFR</b>	Co-location centre
<b>CLC</b>	Carbon Dioxide Equivalents
<b>CO<sub>2</sub> eq.</b>	Central product classification
<b>CPC</b>	European Community Number
<b>EC No.</b>	Exported Energy, Electricity (MJ)
<b>EEE</b>	Exported Energy, Thermal (MJ)
<b>EET</b>	Environmental Footprint
<b>EF</b>	European Norm (Standard)
<b>EN</b>	Eutrophication Potential
<b>EP</b>	Freshwater eutrophication potential (kg P eq.)
<b>EP-freshwater</b>	Marine eutrophication potential (kg N eq.)
<b>EP-marine</b>	Terrestrial eutrophication potential (mol N eq.)
<b>EP-terrestrial</b>	Use of net fresh water (m <sup>3</sup> )
<b>FW</b>	Greenhouse gas
<b>GHG</b>	Globally harmonized system of classification and labelling of chemicals
<b>GHS</b>	Global
<b>GLO</b>	General Programme Instructions
<b>GPI</b>	Global Reporting Initiative
<b>GRI</b>	Global Warming Potential (kg CO <sub>2</sub> eq.)
<b>GWP</b>	Global Warming Potential from biogenic sources (kg CO <sub>2</sub> eq.)
<b>GWP-biogenic</b>	Global Warming Potential from fossil sources (kg CO <sub>2</sub> eq.)
<b>GWP-fossil</b>	Global Warming Potential for greenhouse gases (kg CO <sub>2</sub> eq.)
<b>GWP-GHG</b>	Global Warming Potential from land use and land use change (kg CO <sub>2</sub> eq.)
<b>GWP-luluc</b>	Total Global Warming Potential (kg CO <sub>2</sub> eq.)





# ABBREVIATIONS

<b>GWP-total</b>	Hazardous Waste (disposed) (kg)
<b>HW</b>	International Organization for Standardization
<b>ISO</b>	Kilogram
<b>kg</b>	Kilograms of Carbon
<b>kg C</b>	Kilograms of Carbon Dioxide Equivalent
<b>kg CO<sub>2</sub> eq.</b>	Cubic Meter
<b>m<sup>3</sup></b>	Materials for Energy Recovery (kg)
<b>MER</b>	Megajoule
<b>MJ</b>	Material for Recycling (kg)
<b>MR</b>	Nitrogen Equivalents
<b>N eq.</b>	Not Declared
<b>ND</b>	Non-Hazardous Waste (disposed) (kg)
<b>NHW</b>	Non-Methane Volatile Organic Compounds
<b>NMVOC</b>	Use of non-renewable secondary fuels (MJ)
<b>NRSF</b>	Ozone Depletion Potential (kg CFC-11 eq.)
<b>ODP</b>	Phosphorus Equivalents
<b>P eq.</b>	Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials (MJ)
<b>PENRE</b>	
<b>PENRM</b>	Use of non-renewable primary energy resources used as raw materials (MJ)
<b>PENRT</b>	Total use of non-renewable primary energy resources (MJ)
<b>PERE</b>	Use of renewable primary energy excluding renewable primary energy resources used as raw materials (MJ)
<b>PERM</b>	Use of renewable primary energy resources used as raw materials (MJ)
<b>PERT</b>	Total use of renewable primary energy resources (MJ)
<b>POCP</b>	Photochemical Ozone Creation Potential (kg NMVOC eq.)
<b>RSF</b>	Use of renewable secondary fuels (MJ)
<b>RW</b>	Radioactive Waste (disposed) (kg)
<b>Sb eq.</b>	Antimony Equivalents
<b>SM</b>	Use of secondary material (kg)
<b>SVHC</b>	Substances of Very High Concern
<b>TR</b>	Türkiye
<b>WDP</b>	Water Deprivation Potential (m <sup>3</sup> )





## Contact Information

### Programme & Programme Operator

The International EPD® System  
[www.environdec.com](http://www.environdec.com)



EPD International AB Box 210 60  
SE-100 31 Stockholm, Sweden  
[www.environdec.com](http://www.environdec.com)  
[info@environdec.com](mailto:info@environdec.com)

### Licensee



EPD registered through fully aligned  
regional licensee: EPD Türkiye  
[www.epdturkey.org](http://www.epdturkey.org)  
[info@epdturkey.org](mailto:info@epdturkey.org)  
NEF 09 B Blok No:7/15, 34415  
Kağıthane/İstanbul, Türkiye

### Owner of the declaration



NUH YAPI ÜRÜNLERİ A.Ş.  
Hacıakif Mh, Nuh Çimento Cd No:32,  
41780 Körfez/Kocaeli, Türkiye

Contact person:  
Mr. Ümit Emre Ün  
Sustainability and Environmental  
Executive  
+ 90 (262) 310 50 00  
Email: [umit.un@nuhcimento.com.tr](mailto:umit.un@nuhcimento.com.tr)  
[www.nuhyapi.com.tr/en/](http://www.nuhyapi.com.tr/en/)

### LCA and EPD consultant

METSIMS SUSTAINABILITY  
CONSULTING



**The United Kingdom**  
Clear Water Place  
Oxford OX2 7NL, UK 0 800 722 0185  
[www.metsims.com](http://www.metsims.com)  
[info@metsims.com](mailto:info@metsims.com)  
**Türkiye**  
Nef 09 B Blok No:7/46-47 34415  
Kağıthane/İstanbul, Türkiye  
+90 212 281 13 33



